

TITLE OF THE INVENTION

ORGANIC EL ELEMENT AND METHOD OF MANUFACTURING THE
SAME, ORGANIC EL DISPLAY DEVICE USING THE ELEMENT,
ORGANIC EL MATERIAL, AND
5 SURFACE EMISSION DEVICE AND LIQUID CRYSTAL DISPLAY
DEVICE USING THE MATERIAL

BACKGROUND OF THE INVENTION

1. Field of the Invention

10 The present invention relates to an organic EL
(Electroluminescence) element having a structure in
which an organic EL layer is put between a pair of
electrodes, an organic EL display device employing
the element, organic EL material, and a plane
15 emission device and a display device employing the
material.

2. Description of the Prior Art

In recent years, the organic EL element (the
organic LED) is well appreciated as the spontaneous
20 emission element. The organic EL element has the
advantage that such element can be driven by the low
voltage rather than the inorganic EL element and
also the advantage that such element can be
manufactured without complicated manufacturing
25 processes in contrast to the inorganic LED in the
prior art.

Also, in comparison with the liquid crystal

display device that is widely used at present as the display of the mobile device, the organic EL element has a quick response speed, has a simple device structure, and needs no back-light. Therefore, the organic EL element has the advantage that such element can be reduced in weight. In addition, since the organic EL element is the solid state element, such element has the merit that it is resistant to the impact.

The organic EL element has the structure that the EL emission layer (the organic EL layer) is put between the cathode and the anode. The metal having the large work function is employed as the anode and the metal having the small work function is employed as the cathode, so that supplies of the hole and the electron can be made smooth. Normally, ITO (Indium-Tin Oxide) as the transparent conductor is employed as the anode.

Also, the metal containing the alkaline metal or the alkaline earth metal such as Na (sodium), Na-K (sodium-potassium) alloy, Mg (magnesium), Li (lithium), Mg/Cu (magnesium/copper) mixture, In (indium), etc. is employed as the cathode.

Alq₃, BeBq₃, DCM, DPVBi, quinacridone derivative, coumalin, etc., for example, is employed as the EL emission layer. Normally, the monomer EL emission layer is formed by the vacuum evaporation method,

and the polymer EL emission layer is formed by the spin coating method. Accordingly, the polymer EL emission layer has the advantage that the film formation is easy and also the mechanical strength is high.

In addition, in order to lower the operating threshold voltage of the organic EL element, the trial for forming the buffer layer on the cathode side or the anode side is made. For example, sometimes the layer made of ruthenium oxide (referred to as "RuO" hereinafter), molybdenum oxide (referred to as "MoO" hereinafter), or vanadium oxide (referred to as "VO" hereinafter) is formed as the buffer layer between the anode and the organic EL layer in the prior art. The layer made of RuO, MoO, or VO is formed by the sputter method.

By the way, if the organic EL element is used for a long time, the luminous efficiency is lowered due to the influence of the oxygen and the moisture and also the defect called the dark spot is caused. This is due to the fact that the alkaline metal or the alkaline earth metal employed as the cathode is easily oxidized.

In Patent Application Publication (KOKAI) Hei 7-169567 as the preceding literature, in order to avoid the degradation of the luminous efficiency of the organic EL element due to the oxygen and the

moisture, it is proposed that the laminated body consisting of the anode, the organic EL layer, and the cathode should be covered with the layer formed of material that can adsorb, occlude, or consume the oxygen (referred to as a "sealing layer" hereinafter).

Then, the material such as magnesium oxide, magnesium carbonate, iron oxide, titanium oxide, bentonite, or the like, that is impregnated with platinum, palladium, rhodium, ruthenium, or silver at a concentration of less than 5 wt%, etc. are set forth as the material of the sealing layer.

However, the problems discussed in the following are pointed out in the organic EL element disclosed in the above literature. That is, since the laminated body consisting of the anode, the organic EL layer, and the cathode is covered with the insulating sealing layer, the leading electrode that is extended to the outside of the sealing layer must be provided to the anode and the cathode respectively. As a result, the manufacturing steps become complicated and also the rise of the product cost is brought about.

Also, as described above, sometimes the buffer layer made of RuO, MoO, or VO is formed by the sputter method in order to lower the operating threshold voltage.

However, this method has the drawback that the large unevenness is formed. If it is tried to form the RuO₂ layer of 30nm thickness by the sputter method, for example, the hillock having a height of 50 to 100nm is locally generated. As a result, there is the possibility that, if the thickness of the organic EL layer is reduced, conversely the short-circuit defect is caused.

In addition, in case the full-color image display device using the organic EL elements is fabricated, the organic EL elements for the red color emission, the organic EL elements for the green color emission, and the organic EL elements for the blue color emission must be aligned in both the horizontal direction and the vertical direction in the predetermined order.

Therefore, the technology for patterning finely the organic EL layers is requested. As the fine pattern technology used in manufacturing the semiconductor device, the lift-off method and the etching method are well known.

However, in the case of the monochromatic image display device, it may be considered that, for example, the upper electrodes (the cathodes) of respective pixels are formed by the lift-off method. But it is difficult to apply the lift-off method to the manufacture of the full-color image display

device.

Further, since the organic EL layer is formed of the monomer or polymer organic, such organic EL layer has the drawback that it cannot be worked by the fine pattern technology such as the dry etching, etc.

Moreover, the above organic EL element is noted with interest as the back-light device in place of the cold- cathode lamp that is employed in the liquid crystal display device. The cold-cathode lamp, that is employed as the back-light device in the prior art, has the low luminous efficiency and also occupies about 30 % of the overall cost of the liquid crystal display device, which is a factor of the cost up.

The monomer and polymer materials are known as the organic EL material. Normally the film of the monomer EL material can be formed by the vacuum evaporation method, whereas the film of the polymer EL material can be formed by the coating method. Therefore, the polymer EL material is advantageous in manufacturing cost.

Since the back-light device using the polymer organic EL material can be driven by the low voltage, the reduction in the consumption power of the liquid crystal display device can be expected and also the cost down and the reduction in size of the device

can be expected rather than the cold- cathode lamp in the prior art.

However, the actual circumstances are that the organic EL material that is available in practical use has not been developed yet.

SUMMARY OF THE INVENTION

Therefore, in view of the above circumstances, it is an object of the present invention to provide an organic EL element and a method of manufacturing the same, that is capable of simplifying its manufacturing steps, lowering the product cost, and avoiding the degradation in the luminescence characteristic and the short-circuit defect of an organic EL layer due to the oxygen and the moisture not to cover a laminated body consisting of an anode, the organic EL layer, and a cathode with an insulating sealing layer, and an organic EL display device employing the organic EL element.

Also, it is another object of the present invention to provide organic EL material available in practical use, that can be driven by a low voltage, is capable of achieving the reduction in the power consumption, and achieving the cost down and the reduction in size, and a plane emission device and a display device employing the material.

In order to achieve the above objects, an

organic EL element of the present invention comprises:

an organic EL layer formed between an anode and a cathode; and

5 the cathode consisting of a first conductive film that contacts to the organic EL layer and a second conductive film that constitutes a laminated structure together with the first conductive film, the first conductive film containing any one of an
10 alkaline metal and an alkaline earth metal, and the second conductive film containing a metal that is able to prevent entering of an oxygen and a moisture into the first conductive film when the metal is oxidized.

15 Also, an organic EL element manufacturing method of the present invention comprises the steps of:

forming an anode on a substrate;

forming an organic EL layer on the anodes;

20 forming a first conductive film, that contains any one of an alkaline metal and an alkaline earth metal, on the organic EL layer; and

forming a second conductive film laminated on the first conductive film and containing a metal
25 that is able to prevent entering of an oxygen and a moisture into the first conductive film when the metal is oxidized.

Also, an organic EL element of the present invention comprises:

an anode;

5 a buffer layer which is formed of at least one type metal selected from a group consisting of Ru, Mo, and V on the anode and a surface of which is oxidized;

an organic EL layer formed to be contacted to an oxidized surface of the buffer layer; and

10 a cathode formed on said organic EL layer.

Also, an organic EL element manufacturing method of the present invention comprises the steps of:

forming an anode on a substrate;

15 forming a buffer layer, which contains at least one type metal selected from a group consisting of Ru, Mo, and V, on the anode;

oxidizing a surface of the buffer layer;

forming an organic EL layer on the buffer layer;

20 and

forming a cathode.

Also, an organic EL display device of the present invention comprises:

a substrate;

25 a lower electrode formed on the substrate;

an organic EL layer formed on the lower electrode to have areas in which a conjugate length

of polymer is different each other so that these areas have two different luminous colors or more; and

an upper electrode formed on the organic EL layer.

Also, an organic EL display device manufacturing method of the present invention comprises the steps of:


forming a first electrode on a substrate;
forming an organic EL layer formed of organic EL material, in which a conjugate length of polymer is changed in response to light irradiation, on the first electrode;

irradiating partially a light onto the organic EL layer to change the conjugate length; and

forming a second electrode on the organic EL layer.

Further, in order to achieve the above objects, organic EL material of the present invention consists of:

material made of organic material expressed by a general formula (1)

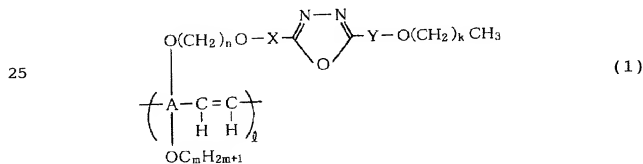

(Where A is a residue obtained by removing at least four hydrogen atoms from an aromatic compound or a heterocyclic compound,

X is an atomic group to which at least two groups that are selected from a group consisting of a residue obtained by removing at least two hydrogen atoms from benzene and a residue obtained by removing at least two hydrogen atoms from cyclohexane are bonded,

Y is an atomic group to which a residue obtained by removing at least two hydrogen atoms from benzene is bonded or at least two residues each obtained by removing at least two hydrogen atoms from benzene are bonded, and

k, m and n are an integer respectively.)


Also, a plane emission device employing organic material of the present invention, comprises:

a transparent substrate;

a transparent conductive film for covering one surface of the transparent substrate;

an alignment film formed on a surface of the transparent conductive film;

a luminous layer made of organic material expressed by a general formula (2)

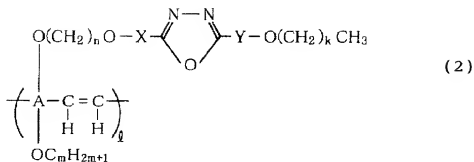

5

(Where A is a residue obtained by removing at least four hydrogen atoms from an aromatic compound or a heterocyclic compound,

10 X is an atomic group to which at least two groups that are selected from a group consisting of a residue obtained by removing at least two hydrogen atoms from benzene and a residue obtained by removing at least two hydrogen atoms from cyclohexane are bonded,

15 Y is an atomic group to which a residue obtained by removing at least two hydrogen atoms from benzene is bonded or at least two residues each obtained by removing at least two hydrogen atoms from benzene are bonded, and

20 k, m and n are an integer respectively.); and an electrode layer formed on a surface of the luminous layer.


Also, a display device employing organic material of the present invention, comprises:

25 a transparent substrate;
a transparent conductive film for covering one

surface of the transparent substrate;

an alignment film formed on a surface of the transparent conductive film;

a luminous layer made of organic material
5 expressed by a general formula (3)

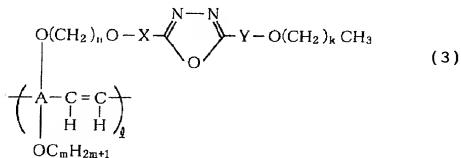

10

15

(Where A is a residue obtained by removing at least four hydrogen atoms from an aromatic compound or a heterocyclic compound,

20

X is an atomic group to which at least two groups that are selected from a group consisting of a residue obtained by removing at least two hydrogen atoms from benzene and a residue obtained by removing at least two hydrogen atoms from cyclohexane are bonded,

25

Y is an atomic group to which a residue obtained by removing at least two hydrogen atoms from benzene is bonded or at least two residues each obtained by removing at least two hydrogen atoms from benzene are bonded, and

k, m and n are an integer respectively.);

an electrode layer formed on a surface of the luminous layer;

5 a liquid crystal layer arranged on a second surface on an opposite side to the first surface of the transparent substrate; and

a polarizing plate arranged on the liquid crystal layer.

10 According to the organic EL element and the method of manufacturing the same of the present invention, the cathode is composed of the first conductive film that contacts to the organic EL layer and the second conductive film formed on the first conductive film, and entering of the oxygen and the moisture into the first conductive film can
15 be prevented by oxidizing the second conductive film.

Therefore, the degradation of the luminous characteristic of the organic EL layer and the generation of the short-circuit defect can be prevented not to cover the laminated body consisting
20 of the anode, the organic EL layer, and the cathode with the insulating sealing layer, and thus the generation of the dark spot can be suppressed for a long time.

Also, according to the organic EL display device
25 manufacturing method of the present invention, the manufacturing steps can be simplified and thus the product cost can be lowered.

Also, according to another organic EL element of the present invention, the buffer layer that contains at least one type metal selected from the group consisting of Ru, Mo, and V is provided between the anode and the organic EL layer, and only the side surface of the buffer layer that contacts to the organic EL layer is oxidized by the short-time annealing, the laser annealing, the plasma oxidation, the anodic oxidation, or the like. Therefore, the unevenness of the surface of the buffer layer is small, and the generation of disadvantages such as the short circuit, etc. can be avoided if the organic EL layer is thinned.

Also, according to the organic EL display device of the present invention, since the areas for emitting the lights in different color by changing the conjugate length of polymer constituting the organic EL layer respectively are formed, the multi-color emission organic EL display device can be easily manufactured.

Also, according to the organic EL material of the present invention, since such organic EL material contains the benzene ring in the principal chain and contains the oxadiazole in the side chain, for example, it can emit the polarized light.

As a result, if the organic EL material of the present invention is employed in the back-light

panel, the plane emission device that can be driven by the low voltage and can reduce the power consumption can be obtained. Also, since the display device that is constructed by the back-light panel using the organic EL material, the liquid crystal panel, and the polarizing plate can obtain the polarized light from the luminous layer made of the organic EL material, there is no necessity that the polarizing plate is provided between the back-light panel and the liquid crystal panel and thus the utilization factor of the light can be increased.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG.1 is a sectional view showing an organic EL element according to a first embodiment of the present invention;

FIG.2 is a plan view showing an arrangement of anodes and cathodes that constitute a display device in which organic EL elements shown in FIG.1 are arranged in a matrix fashion;

FIG.3 is a plan view showing an example in which the organic EL elements shown in FIG.1 are applied to an active- matrix organic EL display device;

FIGS.4A to 4D are views showing respective steps of manufacturing an organic EL element according to a second embodiment of the present invention in

section;

FIGS.5A to 5D are views showing respective steps of manufacturing an organic EL display element according to a third embodiment of the present invention in plan; and

FIG.6 is a sectional view showing the pertinent portion of a liquid crystal display device that is constructed by using organic EL elements according to a fourth embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be explained with reference to the accompanying drawings hereinafter.

(First Embodiment)

FIG.1 is a sectional view showing an organic EL element according to a first embodiment of the present invention.

An ITO film of about 200nm thickness is formed as an anode 12 on a glass substrate 11. Also, a poly[3-(4- alkyiphenyl)thiophene] film of about 150nm thickness is formed as an organic EL layer (a luminous layer) 13 in the predetermined area on the anode 12.

In addition, a laminated film having the double- layered structure consisting of a first conductive film 14a made of the conductor containing

Mg and a second conductive film 14b made of the conductor containing Ru is formed as a cathode 14 on the organic EL layer 13. In this example, a thickness of the first conductive film 14a is about 100nm, and a thickness of the second conductive film 14b is about 50nm.

The anode 12 is not limited to ITO, and any conductor having the large work function may be employed. In this case, if the light is irradiated to the substrate 11 side, the anode 12 must be formed of the conductor that can transmit the light.

The first conductive film 14a may be formed of the conductor containing the alkaline metal or the alkaline earth metal that has the small work function. For example, MgAg, AlLi, LiF, etc. may be employed as the material of the first conductive film 14a. Assume that the first conductive film 14a is formed of MgAg.

Also, the second conductive film 14b is not limited to the conductor containing Ru, and also may be formed of the conductor that has the high barrier characteristic to the oxygen, more particularly, the metal or its oxide selected from the group consisting of Ru, Rh, Ir, Os and Re.

The oxides of Ru, Rh, Ir, Os and Re have also the conductivity. Accordingly, the conductivity of the cathode 14 is never damaged by the oxidation.

In addition, a TiN film or a laminated film consisting of TiN and Ti (referred to as a "TiN/Ti film" hereinafter) may be employed as the second conductive film 14b. These films have also the good barrier characteristic to the oxygen, and can prevent the oxidation of the first conductive film 14a. Also, the conductivity of both the TiN film and the TiN/Ti film is in no way degraded even if they are exposed to the oxygen-containing atmosphere for a long time.

Further, a laminated film consisting of the conductive film, the conductive film containing the metal selected from the group consisting of Ru, Rh, Ir, Os and Re or its oxide, and the TiN film or the TiN/Ti film may be employed as the second conductive film 14b.

In the organic EL element constructed in this manner according to the first embodiment, if the positive voltage is applied to the anode 12 and the negative voltage is applied to the cathode 14, the organic EL layer can emit the light.

In the first embodiment, since the second conductive film 14b containing Ru is formed on the first conductive film 14a that contains Mg as the alkaline metal, Ru in the second conductive film 14b is oxidized to prevent the entering of the oxygen into the first conductive film 14a even if the

organic EL element is exposed to the atmosphere containing the oxygen or the moisture for a long time. Accordingly, the oxidation in the first conductive film 14a can be avoided.

5 As a result, in the organic EL element according to the first embodiment, the degradation of the luminescence characteristic due to the oxygen or the moisture can be avoided and also the generation of the dark spot can be suppressed. Also,
10 since the oxidation of the first conductive film 14a can be avoided, the peeling-off between the organic EL layer 13 and the first conductive film 14a can be prevented. In addition, there is no necessity that the laminated body consisting of the anode 12, the
15 organic EL layer 13, and the cathode 14 should be covered with the insulating material, and thus the manufacture of the element can be facilitated.

 A method of manufacturing the organic EL element according to the first embodiment will be
20 explained hereunder.

 First, the ITO film of about 200nm thickness is formed on the overall upper surface of the glass substrate 11 by the sputter method. Then, the poly[3-(4-alkylphenyl) thiophene] film of 150nm
25 thickness is formed on the overall upper surface of the glass substrate 11 by the spin coating method, and is used as the organic EL layer 13.

In the first embodiment, the material of the organic EL layer 13 is not limited to the above poly[3-(4- alkylphenyl)thiophene]. Various organic EL emission materials of the monomer series or the polymer series may be employed as the organic EL layer 13.

Then, the first conductive film 14a is formed by forming the MgAg film of about 100nm thickness on the organic EL layer 13 by virtue of the sputter method. Then, the second conductive film 14b is formed by forming the Ru film of about 50nm thickness thereon.

Then, a pair of terminals that are connected to the anode 12 and the cathode 14 respectively are formed by sputtering the metal such as Au, Al, or the like while using a metal mask. Accordingly, the organic EL element according to the first embodiment can be completed.

As shown in FIG.2, if the anodes 12 are formed like the stripe shape and the cathodes 14 are formed like the stripe shape in the direction that orthogonally intersects with the anodes 12, the display device in which a plurality of organic EL elements (intersecting portions of the anodes 12 and the cathodes 14) 15 are arranged on the glass substrate 11 in a matrix fashion can be constructed.

In this display device, like the simple-matrix

liquid crystal display device, if the positive signal is supplied in sequence to a plurality of anodes 12 aligned in the vertical direction at a timing in synchronism with the horizontal synchronizing signal and also the negative signal is supplied in sequence to a plurality of cathodes 14 aligned in the horizontal direction within one horizontal synchronization period, desired images can be displayed on the organic EL display device.

Also, the present invention can be applied to the active-matrix organic EL display device shown in FIG.3. More particularly, if the cathode 14 is formed every pixel and also the voltage applied to the cathodes 14 via switching elements 19, each being connected to a data line 16, a power supplying line 17, and a scanning line 18, is controlled every pixel, the desired images can be displayed on the organic EL display device. In this case, since the anode 12 is used as the common electrode for respective pixels, there is no necessity of the patterning.

In addition, in the above first embodiment, the case is explained where the organic EL layer 13 is directly formed on the anode 12 and the cathode 14 is directly formed on the organic EL layer 13. The buffer layer may be provided between the anode 12 and the organic EL layer 13 or between the organic

EL layer 13 and the cathode 14.

(Second Embodiment)

FIGS.4A to 4D are sectional views showing a method of manufacturing an organic EL element according to a second embodiment of the present invention.

The second embodiment shows an example of the organic EL element in which the buffer layer is provided between the anode and the organic EL layer.

10 First, as shown in FIG.4A, the ITO film of 200nm thickness is formed on an upper side of a glass substrate 21 by the sputter method to construct an anode (lower electrode) 22.

15 Then, as shown in FIG.4B, the Ru (ruthenium) film of 30nm thickness is formed on the anode 22 by the sputter method to construct a buffer layer 23. Then, as shown in FIG.4C, the short-time annealing (RTA) is carried out at the temperature of 700 °C for 3 to 5 seconds by using the RTA (Rapid Thermal
20 Annealing) equipment that heats by the lamp.

The Ru on the surface of the buffer layer 23 is oxidized by this short-time annealing. In this case, since RuO can be generated in a very short time, the particle size of the RuO is small and thus the situation that the large unevenness is formed on the
25 surface of the buffer layer 23 can be avoided.

In this case, it is preferable that a thickness

of the buffer layer 23 (the thickness before RTA) should be set smaller than 50nm. This is because, if the thickness of the buffer layer 23 exceeds 50nm, the light generated from an organic EL layer 24 is absorbed by the buffer layer 23 and thus the apparent luminescence intensity is lowered. Also, Mo or V as well as above Ru may be employed as the material of the buffer layer 23.

Then, as shown in FIG.4D, the poly[3-(4-alkylphenyl) thiophene film of about 150nm thickness is formed on the buffer layer 23 by the spin coating method to construct the organic EL layer 24. The material of the organic EL layer 24 is not limited to the above poly[3-(4-alkylphenyl) thiophene, and various organic EL materials of the monomer series or the polymer series may be employed.

Then, the AlLi film of about 20nm thickness is formed on the organic EL layer 24 by the sputter method to construct a cathode (upper electrode) 25. Accordingly, the organic EL element according to the second embodiment can be completed. In this case, the material of the cathode 25 is not limited to the above AlLi, and the conductor containing the alkaline metal or the alkaline earth metal may be employed. Also, as described in the first embodiment, the cathode 25 may be formed to have the double-layered structure.

Actually measured results of the operating threshold voltage and the surface unevenness of the buffer layer after the above organic EL element is actually manufactured will be explained hereunder.

5 TDP/Alq₃ is employed as the material of the EL emission layer 24 and then the organic EL element is formed by the above methods, and then the operating threshold voltage is measured. As a result, an emission starting voltage is 7 V if no buffer layer
10 23 is provided whereas the emission starting voltage is 3.5 V if the buffer layer 23 is provided by the above method, whereby the reduction in the threshold voltage can be confirmed.

Also, when the unevenness of the surface of the
15 buffer layer 23 is measured, such unevenness is 5nm to 10nm in the second embodiment. In contrast, in case RuO₂ is formed as the buffer layer by the sputtering, the unevenness of the surface of the buffer layer is 50nm to 100nm. As a result, the
20 validity of the second embodiment can be checked.

According to the second embodiment, RuO, MoO, or VO that is effective to lower the operating threshold voltage is formed by forming the metal film of Ru, Mo, or V as the buffer layer 23 and then
25 oxidizing the surface of the buffer layer 23 by the RTA. In this case, since the surface of the buffer layer 23 is oxidized in a short time, the situation

that the large unevenness is formed on the surface of the buffer layer 23 can be avoided.

As a consequence, the short-circuit between the anode 22 and the cathode 25 can be avoided even if the thickness of the organic EL layer 24 is reduced, and thus the organic EL element having the low operating threshold voltage can be fabricated.

The second embodiment can be applied to the simple-matrix organic EL display device and the active-matrix organic EL display device, like the first embodiment.

In the second embodiment, the surface of the buffer layer 23 is oxidized by the RTA equipment that uses the lamp to heat. The surface of the buffer layer 23 may be oxidized by the laser beam irradiation, the plasma oxidation method, or the anodic oxidation method.

In case the surface of the buffer layer 23 is oxidized by the laser beam irradiation, the XeCl excimer laser is employed, for example. The surface of the buffer layer 23 is oxidized in a short time by scanning the laser beam, that is shaped into the rectangular shape having a narrow width, in the width direction. The energy of the laser beam is set to 390 mJ/cm_2 , for example.

In case the surface of the buffer layer 23 is oxidized by the plasma oxidation method, such

surface of the buffer layer 23 is exposed to the plasma containing the oxygen to oxidize the surface of the buffer layer 23. For example, the plasma oxidation process is performed by the RF O₂ plasma method under the conditions that the processing time is 10 minutes, the pressure is 40 Pa, and the power is 200 W.

In case the surface of the buffer layer 23 is oxidized by the anodic oxidation method, the mixed solution consisting of tartaric acid, ethylene glycol, and ammonia solution is employed as the electrolysis solution and the Pt (platinum) electrode is employed as the anode, for example. Then, the surface of the buffer layer 23 is anodic-oxidized by supplying a constant current of 5 mA to deposit a RuO₂ film.

The similar advantages such as the reduction in the operating threshold voltage, the avoidance of the formation of the uneven surface of the buffer layer, etc. can be achieved even when the surface of the buffer layer 23 is oxidized by any one of above methods.

(Third Embodiment)

FIGS. 5A to 5D are plan views showing manufacturing steps of an organic EL display device according to a third embodiment of the present invention.

This third embodiment shows an example of a method of manufacturing the full-color organic EL display device.

First, as shown in FIG.5A, an ITO film of about 200nm thickness is formed by sputtering ITO on the overall upper surface of a glass substrate 31. Then, anodes (lower electrodes) 32 are formed by patterning the ITO film into a stripe shape by virtue of the photolithography. In this case, a width of the anode 32 is set to 20 μm , for example.

Then, an EL emission layer 33 is formed by forming poly[3-(4-alkylphenyl)thiophene] on the overall display area of the glass substrate 31 by virtue of the spin coating method to have a thickness of 1500 Å.

In the present invention, the material of the EL emission layer 33 is not limited to poly[3-(4-alkylphenyl) thiophene]. But such EL emission layer 33 must be formed of the polymer whose conjugate length can be changed by the light irradiation.

Then, as shown in FIG.5B, the ArF laser beam is irradiated onto areas other than the red-color pixel area (R) (i.e., the green-color pixel area (G) and the blue-color pixel area (B)) under the condition of 1000 mJ/cm². As a result, the EL emission layer that is not subjected to the laser beam irradiation emits the red-color light (the wavelength of about

650 nm) whereas the EL emission layer that is subjected to the laser beam irradiation emits the green- color light (the wavelength of about 510 nm) because the conjugate length is shortened.

5 In FIG.5B, the red-color light emitting portion of the organic EL layer is denoted by 33R and the green-color light emitting portion is denoted by 33G.

10 In this case, since the relationship between the irradiation intensity of the laser beam and the emitted color of the EL emission layer is different depending on the material of the EL emission layer, the laser beam irradiation conditions must be changed appropriately to meet the material.

15 Then, as shown in FIG.5C, the ArF laser beam is irradiated onto the blue-color pixel area of the EL emission layer under the condition of 4000 mJ/cm^2 . As a result, the EL emission layer that is subjected to the laser beam irradiation emits the blue-color light (the wavelength of about 460 nm) because the
20 conjugate length is further shortened. In FIG.5C, the blue-color light emitting portion of the organic EL layer is denoted by 33B.

25 Then, as shown in FIG.5D, cathodes (upper electrodes) 34 are formed on the EL emission layer 33 by the lift-off method. That is, photoresist is coated on the overall upper surface of the glass substrate, and then windows used to form the upper

electrodes are opened in the resist film via exposing and developing steps. Then, AlLi is sputtered on the overall upper surface of the glass substrate to have a thickness of 200nm, and then the AlLi film on the resist film is removed together with the resist. Thus, the cathodes 34 are formed.

The material of the cathodes 34 is not limited to above AlLi. Any conductor that contains the alkaline metal or the alkaline earth metal having the small work function may be employed.

In the third embodiment, as described above, the RGB- color emitting pixels are formed by using the polymer whose conjugate length can be changed by the laser beam irradiation to change the emitted color. In other words, since the multi-color emitting organic EL element can be formed not to employ the fine pattern technology such as the dry etching, etc., that requires the area separation of the organic EL layer 33 pixel by pixel, the number of manufacturing steps can be reduced and thus the production cost of the device can be reduced. Thus, the full-color EL display device having three RGB-color pixels can be implemented.

In the third embodiment, the organic EL layer 33 is formed directly on the anodes (lower electrodes) 32, and then the cathodes (upper electrodes) 34 are formed directly on the organic EL layer 33. In this


case, the buffer layer may be formed at least between the anodes 32 and the organic EL layer 33 and between the organic EL layer 33 and the cathodes 34.

In the third embodiment, the manufacturing method of the simple-matrix organic EL display device is explained. Also, the present invention can be applied to the manufacture of the active-matrix organic EL display device.

(Fourth Embodiment)

Next, organic EL material and a plane emission device and a display device using the same according to a fourth embodiment of the present invention will be explained with reference to FIG.6 hereunder.

The organic EL material of the present invention can be expressed by a following general formula (4).

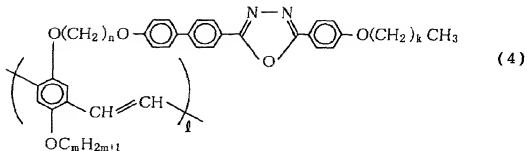

As apparent from the above general formula (4), a principal chain is constructed by the repetition unit consisting of the residue of the benzene, from

which four hydrogen atoms are removed, and the vinylene group. Two side chains are bonded to the benzene ring constituting the principal chain.

One of the side chains is the univalent ether group having the carbon number m . Here m is an integer to satisfy the condition of $5 \leq m \leq 15$, and l is an integer to give the number of molecules of one hundred thousand to five millions.


Next, the chemical structure of the other of the side chains will be explained hereunder.

The alkylenedioxy group having the carbon number n , the biphenylene group, the residue of oxadiazole from which two hydrogen atoms are removed, the phenylene group, and the univalent other group having the carbon number $k+1$ are bonded in series to the benzene ring constituting the principal chain in this order.


This side chain portion has properties like the liquid crystal. Here n is an integer to satisfy the condition of $5 \leq n \leq 15$, and k is an integer to satisfy the condition of $5 \leq k \leq 15$. If k , m , n are set too small, the compound expressed by the general formula (4) is difficult to dissolve into the organic solvent. In contrast, if k , m , n are set too large, the synthesis of the compound becomes difficult.

Next, the method of synthesizing the organic EL material will be explained hereunder.


First, the benzene derivative expressed by a following general formula (5) is prepared.



10 Also, the oxadiazole derivative expressed by a following general formula (6) is prepared.



20 The compound expressed by a following general formula (7) is obtained by mixing the benzene derivative expressed by the above general formula (5) and the oxadiazole derivative expressed by the above general formula (6) and then adding the potassium hydroxide to the resultant solution.

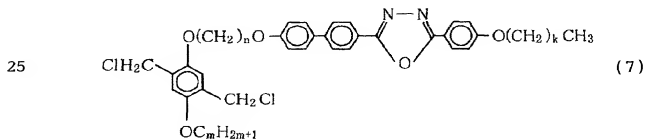

Further, the polymerization reaction is caused by adding $\text{KOC}(\text{CH}_3)_3$ to this compound. Thus, the organic EL material expressed by the above general formula (4) can be synthesized.

5 Next, a liquid crystal display device serving as the organic EL display device of the present invention employing the above organic EL material will be explained hereunder.

10 The liquid crystal display device shown in FIG.6 in section is constructed to include a back-light panel 1, a liquid crystal panel 70, and a polarizing plate 80.

15 The back-light panel 1 has a laminated structure by stacking a transparent substrate 2, a transparent electrode 3, an alignment film 4, a luminous layer 5 and an electrode 6 in this order. The transparent electrode 3 is formed of the indium tin oxide (ITO), and its thickness is about 200 nm. The ITO film is formed by the sputtering.

20 The alignment film 4 is formed of the mixture consisting of poly 3, 4-ethylenedioxythiophene (PEDOT) and polystyrenesulfonate (PSS). The alignment film 4 is formed by the spin coating method, and its thickness is about 200 nm. The
25 rubbing process is applied to a surface of the alignment film 4. Polyaniline, etc. may be used as the material of the alignment film.

Next, a method of forming the luminous layer 5 will be explained hereunder.

The solution, in which the organic EL material expressed by the above general formula (4) is dissolved in the organic solvent such as toluene, chloroform, etc., is spin-coated on the surface of the alignment film 4. After the coating, the substrate is heated to exceed the mesomorphic temperature of the organic EL material and then is cooled down to the room temperature. When the temperature is in excess of the mesomorphic temperature, the side chain portions containing oxadiazole as the organic EL material expressed by the above general formula (4) are aligned in parallel with the rubbing direction of the alignment film 4.

When the substrate is cooled down to the room temperature into the solid state, this alignment state can be maintained without the influence of the external electric field, etc. The electrode 6 is a conductive film made of AlLi alloy having a thickness of about 300 nm. The AlLi alloy film is formed by the vacuum evaporation, etc., for example. The liquid crystal panel 70 is the active-matrix panel employing thin film transistors (TFTs), for example. Since the TFT liquid crystal panel has the well known structure, the outline thereof will be

explained hereunder.

Transparent pixel electrodes 74 arranged in a matrix fashion are formed on an opposing surface of a TFT side transparent substrate 71. A transparent
 5 opposing substrate 72 is arranged in parallel with the TFT side transparent substrate 71 so as to oppose to the pixel electrodes 74.

A transparent common electrode 75 is formed on an opposing surface of the opposing substrate 72. A
 10 liquid crystal layer containing liquid crystal material is put between the TFT side transparent substrate 71 and the opposing substrate 72.

Although not shown in FIG.6, an alignment film, TFTs, a black matrix, and others are formed. A
 15 rotating angle of a linearly polarized light, that propagate through a liquid crystal layer 73 in the thickness direction, can be controlled by applying the voltage between the pixel electrodes 74 and the common electrode 75.

The TFT side transparent substrate 71 is adhered to the transparent substrate 2 of the back-light panel 1. The polarizing plate 80 is adhered to an outer surface of the opposing substrate 72. If viewed along the direction perpendicular to the
 25 substrate surface, the polarization axis of the polarizing plate 80 intersects orthogonally with the rubbing direction of the alignment film 4.

Next, the operational principle of the liquid crystal display device shown in FIG.6 will be explained hereunder.

When the carriers are injected into the luminous layer 5 by applying the DC voltage to both electrodes such that the electrode 6 act as the negative electrode and the transparent electrode 3 acts as the positive electrode, the polarized light is irradiated from the luminous layer 5 to the liquid crystal panel 70 side. The polarization direction of the irradiated light is in parallel with the alignment direction of the side chains containing oxadiazole in the above general formula (4), i.e., the rubbing direction of the alignment film 4.

If the polarized direction is not rotated when the polarized light passes through the liquid crystal panel 70, such polarized light does not pass through the polarizing plate 80 and thus the black display state is obtained. If the polarized direction is rotated by 90 degree, the polarized light passes through the polarizing plate 80 and thus the white display state is obtained. If the rotating angle is between 0 degree and 90 degree, the intermediate tone display state is obtained.


In the liquid crystal display device shown in FIG.6, the polarized light is irradiated from the

back-light panel 1. For this reason, no polarizing plate is arranged between the back-light panel 1 and the liquid crystal panel 70.

Therefore, the utilization factor of the irradiated light can be increased. Also, both the reduction in the consumption power and the reduction in size can be achieved rather than the case where the cold-cathode lamp is employed.

In the above fourth embodiment, the biphenylene group is bonded to the carbon atom on the principal chain side of oxadiazole in the above general formula (4). This biphenylene group may be replaced with the atomic group to which two or more phenylene groups and two or more cyclohexylene groups are bonded in total.

A general formula (8) shown in the following shows the case where the biphenylene group is replaced with the atomic group to which one phenylene group and one cyclohexylene group are bonded.




25

A general formula (9) shown in the following shows the case where the biphenylene group is

replaced with the atomic group to which two phenylene groups and one cyclohexylene group are bonded like a chain.

5



Also, in the above fourth embodiment, the case is shown where one phenylene group is bonded to the carbon atom at the top end side of the side chain of the oxadiazole in the above general formula (4). This one phenylene group may be replaced with the atomic group to which two phenylene groups or more are bonded like a chain. Also, the case is explained where the benzene ring is contained in the principal chain of the organic EL material. The structure that the residue which is obtained by removing a part of hydrogen atoms from condensed polycyclic hydrocarbon, heterocyclic compound, or condensed heterocyclic compound is contained in addition to the benzene ring may be employed.

As an example of the condensed polycyclic hydrocarbon, there may be listed naphthalene, anthracene, or the like. As an example of the heterocyclic compound, there may be listed pyrrole, thiophene, furan, or the like. Also, as an example

of the condensed heterocyclic compound, there may be listed carbazole, fluorine, or the like.

The present invention is not limited to the above embodiments, and various variations, modifications, and combinations may be applied.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
222